


### Interfilm Cellophane Coated Cellulose Film

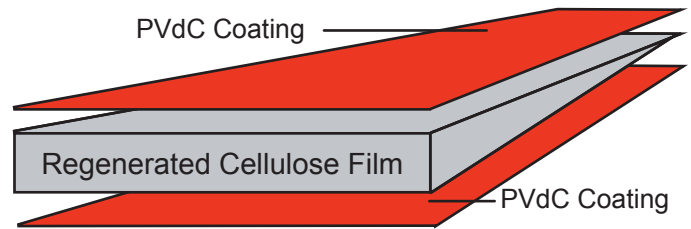

## Product Features

**DESCRIPTION:** A regenerated cellulose film, coated by a solvent process on both sides with a PVdC copolymer. This material has high gloss and transparency and excellent dead-fold characteristics, in addition to being biodegradable and compostable. The film is heat sealable on both sides and provides excellent barrier to water vapor, gasses and aromas and is resistant to oils and greases. It also has anti-static properties and is receptive to inks, adhesives and tear tapes.

### FEATURES:

- PVdC Coated for Barrier Properties
- High Gloss and Transparency
- Heat Sealable on Both Sides
- Good Surface for Ink and Adhesives
- Anti-Static

### APPLICATIONS:

- Windowing and Laminating
- Packaging: Overwrap and Laminations
- Easy Tear Tapes

Property	Value		Unit	Test Method
<b>Physical Properties</b>				
Thickness	90	150	gauge	
Yield	22,000	14,000	in <sup>2</sup> /lb	
Tensile Strength	MD TD	18,000 8,000	PSI	ASTM D 882
Elongation	MD TD	20 55	%	ASTM D 882
<b>Thermal Properties</b>				
Seal Strength	250		g(f)/inch	275°F x 0.5 secs
<b>Barrier Properties</b>				
Water Vapor Transmission	0.45		g/100in <sup>2</sup> /24hrs	100°F x 90% RH
Oxygen Transmission	0.50		cc/100in <sup>2</sup> /24hrs	75°F x 0-5% RH
<b>Length</b>				
13" OD	11,200	7,100	feet	
18" OD	22,400	14,300	feet	

\* All values +/- 10%

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Interfilm Holdings, Inc., and Interfilm Holdings, Inc., makes no warranty of results to be obtained. Users should make their own tests to determine the suitability of these products for their own particular purposes. However, because of the numerous factors affecting results, Interfilm Holdings, Inc., MAKES NO REPRESENTATIONS OF ANY WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, OR ANY OTHER MATTER WITH RESPECT TO THE MATERIAL OTHER THAN THAT THE MATERIAL CONFORMS TO ITS APPLICABLE CURRENT STANDARD SPECIFICATIONS. Statements herein, therefore, should not be construed as representations or warranties. THE RESPONSIBILITY OF INTERFILM HOLDINGS, INC. FOR CLAIMS ARISING OUT OF BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE IS LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

## Standard Roll Sizes

Available Core Sizes →	3"	3"	3"	6"
Approximate Roll OD →	9.5	13	18	18 <sup>3/4</sup> "
Standard Cellophane Gauges	Approximate Roll Lengths			
76	6,500	13,000	26,000	
86	5,700	11,400	22,800	
87	5,700	11,400	22,800	
90	5,700	11,400	22,800	
99	5,000	10,000	20,000	
100	5,000	10,000	20,000	
121	4,100	8,200	16,400	
137	3,600	7,200	14,400	
150	3,600	7,200	14,400	
160	3,000	6,000	12,000	
164	3,000	6,000	12,000	
170	2,900	5,750	11,500	

\*Non-standard roll lengths/OD's are available on special request.

### Available Widths

- Most films are available in roll widths from ¼ inch to 80 inches

### Minimum Order Quantities

- Minimum order quantity is 500 lbs. Freight will be prepaid and added to invoice.
- Production orders less than 500 lbs. will incur a less than minimum order fee.
- Orders greater than 1000 lbs. are shipped freight paid.

### Plant Locations

Nationwide service through four plants locations.

