


Procite®
Balanced Window Film

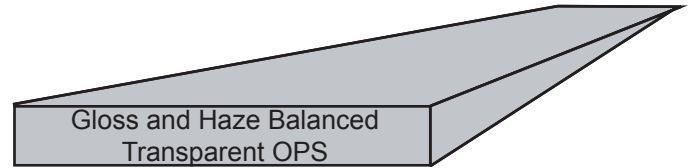

Product Features

DESCRIPTION: A low dusting, low gloss, translucent, oriented polystyrene film designed for window envelope patches. Particularly designed for efficient processing of window envelopes on high speed USPS equipment.

FEATURES:

- Low Dust
- Balanced Gloss and Haze
- Good Dimensional Stability
- Consistent Gauge Tolerance

APPLICATIONS:

- Window Envelope Patches

Property		Value				Unit	Test Method
Physical Properties							
Thickness		105	115	125	150	gauge	
Yield		25,190	23,000	21,160	17,635	in ² /lb	ASTM D 4321
Tensile Strength	MD	11,500				PSI	ASTM D 882
	TD	10,500					
Elongation	MD	20				%	ASTM D 882
	TD	40					
1% Secant Modulus	MD	430,000				PSI	ASTM D 882
	TD	415,000					
Optical Properties							
Gloss (60°)		72				%	ASTM D 2457
Haze		18				%	ASTM D 1003

* All values +/- 10%

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Interfilm Holdings, Inc., and Interfilm Holdings, Inc., makes no warranty of results to be obtained. Users should make their own tests to determine the suitability of these products for their own particular purposes. However, because of the numerous factors affecting results, Interfilm Holdings, Inc., MAKES NO REPRESENTATIONS OF ANY WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, OR ANY OTHER MATTER WITH RESPECT TO THE MATERIAL OTHER THAN THAT THE MATERIAL CONFORMS TO ITS APPLICABLE CURRENT STANDARD SPECIFICATIONS. Statements herein, therefore, should not be construed as representations or warranties. THE RESPONSIBILITY OF INTERFILM HOLDINGS, INC. FOR CLAIMS ARISING OUT OF BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE IS LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

Standard Roll Sizes

Available Core Sizes →	3"	3"
Approximate Roll OD →	13	18
Gauge	Approximate Roll Lengths	
105	9,500	19,000
115	8,500	17,000
125	8,000	16,000
150	6,700	13,400

*Non-standard roll lengths/OD's are available on special request.

Available Widths

- Most films are available in roll widths from ¼ inch to 80 inches

Minimum Order Quantities

- Minimum order quantity is 500 lbs. Freight will be prepaid and added to invoice.
- Production orders less than 500 lbs. will incur a less than minimum order fee.
- Orders greater than 1000 lbs. are shipped freight paid.

Plant Locations

Nationwide service through four plants locations.

