


Interfilm Polyethylene Low Density Film

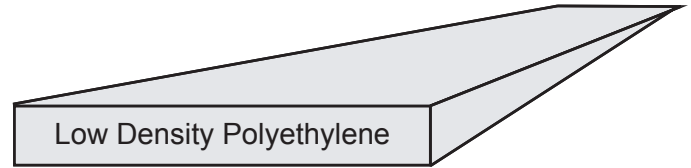

Product Features

DESCRIPTION: A general purpose, homo-polymer, low density, polyethylene film that features good optics, standard impact strength and high slip.

FEATURES:

- Good Optics
- Good Impact Strength
- High Slip

APPLICATIONS:

- Windows and Laminating
- Bag Making
- Packaging

Property		Value		Unit	Test Method
Physical Properties					
Thickness		150	200	gauge	
Yield		20,000	15,000	in ² /lb	
Tensile Strength	MD	3,100		PSI	ASTM D 882
	TD	2,950			
Elongation	MD	350		%	ASTM D 882
	TD	600			
COF	Inside	0.15			ASTM D 1894
	Outside	0.15			
Secant Modulus	MD	30,000		PSI	ASTM D 882
	TD	32,000			
Dark Impact Resistance		230		g	ASTM D 1709
Density		0.923		g/cm ³	ASTM D 1505
Optical Properties					
Haze		11		%	ASTM D 1003
Gloss		57		%	ASTM D 2457

* All values +/- 10%

The information and recommendations in this publication are, to the best of our knowledge, reliable. Suggestions made concerning uses or applications are only the opinion of Interfilm Holdings, Inc., and Interfilm Holdings, Inc., makes no warranty of results to be obtained. Users should make their own tests to determine the suitability of these products for their own particular purposes. However, because of the numerous factors affecting results, Interfilm Holdings, Inc., MAKES NO REPRESENTATIONS OF ANY WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING THOSE OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, OR ANY OTHER MATTER WITH RESPECT TO THE MATERIAL OTHER THAN THAT THE MATERIAL CONFORMS TO ITS APPLICABLE CURRENT STANDARD SPECIFICATIONS. Statements herein, therefore, should not be construed as representations or warranties. THE RESPONSIBILITY OF INTERFILM HOLDINGS, INC. FOR CLAIMS ARISING OUT OF BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE IS LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.